Settings & Preferences

Press and hold the MRK and SEN buttons to access Preferences. To exit Preferences, simply wait a few seconds v

		Press VOLUME + or - to change your setting within a category	Autorowei	1 Hour 2 Hours 4 Hours* 8 Hour	rower cans on or on depending on your venicles ignition type (constant power or switched) Powers off automatically after 1 hour Powers off automatically after 2 hours Powers off automatically after 4 hours Powers off automatically after 8 hours Powers off automatically after 8 hours	
User Mode	Advanced* Novice	Access and customize all Settings and Preferences Access and customize units and display color, (all other Settings are set to factory defaults) NOTE: Switch back to advance mode to view all Preferences			NOTE: If auto power is on, the display screen goes blank after 30 minutes to save screen life. Display screen will turn on automatically after you reach 10 MPH	
Display Color	Blue*/Green/Red/Ambe	^r Set color to match your vehicle's dash display	Band Enables	Default* Modified	Default Settings for North America Customize the bands you want to monitor	
Speed Display	On* Off	Displays current speed Displays battery voltage	Press SEN to go from one band category to the next		Press VOLUME + or – to change your setting within a category	
Cruise Alert	Off / 20-90 mph 20 mph*	Offers double beep alert tones below specified speed	X Band K Band	On*/Off On*/Off		
Over Speed	Off / 20-90 mph 70 mph*	Reminds you when you exceed a specified speed	Ka Band Ka-POP Laser	On* / Off On / Off* On* / Off		
Meter Mode	Standard* Spec Expert Simple	Single band with bar graph of signal strength Single band with numeric frequency Multiple bands with bar graph of signal strengths Simple messages replace bands: Caution (if traveling below cruise alert limit) Slow Down (if traveling above cruise alert limit)	TSR	On* / Off	Automatically rejects traffic flow sensors-monitoring false alarms	
			Marker Enable	On* / Off Modified	Other, Red Light Camera, Red and Speed Camera, and Speed Trap Customize the types of locations you want to mark for future reference	
Tones	Standard* Mild	Standard ESCORT alert tones Mild doorbell chime alert tones	Press SEN to go from one marker category to the next		Press VOLUME + or – to change your setting within a category	
AutoMute	On* / Off	Automatically reduces audio during alert	Other	On* /Off	Other location	
AutoLearn	On* / Off	Automatically stores and locks out false alarms	Redlight Red & Speed	On* / Off On* / Off	Red light camera Red light & speed camera	
Units	English*/Metric	Units for distance and speed	Speed Cam	On* / Off	Speed camera	
Voice	On* / Off	Voice announcements	Speed Trp	On* / Off	Speed trap	
GPS Filter	On*/Off	Enables GPS-powered features	Clear Locations	Marked Lockouts Defender Format	Clear all user Marked locations. Press SEN button to confirm Clear all lockouts. Press SEN button to confirm Clear all DEFENDER data. Press SEN button to confirm Clear DEFENDER database, all markers, and all lockouts. Press SEN button to confirm	

AutoPower Off

*Default Setting

Power turns on or off depending on your vehicle's ignition

Notes for Settings & Preferences

For descriptions of features and functions available when connected to SmartCord Live with ESCORT Live visit EscortInc.com and download the SmartCord Live user manual for your iOS or Android OS smartphone. Also visit Escort.Inc.com for the PASSPORT Max Owner's Manual.

To view serial number and software revision press MRK and MUTE while powering on detector.

To restore PASSPORT Max to its original factory Settings, press and hold SEN and BRT while turning the power on. A "Restored" message will display, acknowledging the reset.

Software Updates

PASSPORT's red light and speed camera database is easily updated using our exclusive detector software tools found on our web site. Firmware, or the operating software for the detector, can also be updated using these tools.

In order to have access to these updates, you must register your PASSPORT at www. EscortRadar.com. Once registered, you will receive email notifications that updates are now available for your database or firmware. To handle your software and DEFENDER updates you need to connect your Max to a computer first. You can connect Max to a computer via USB/USB Mini B cable.

Contact Us

••••••

Accessories 800.433.3487

Designed in the USA

ESCORT Inc. 5440 West Chester Road West Chester OH 45069

Sales/Service 800.433.3487 www.EscortInc.com

©2013 ESCORT Inc. Escort®, Passport® Max, Escort Live!™, Defender®, AFR®, TrueLock[™], SmartShield[®], SpecDisplay[™], AutoSensitivity[™], High Definition Radar™, ExpertMeter™ and Cincinnati Microwave are trademarks of ESCORT Inc. Manufactured in Canada, Features, specifications and prices subject to change without notice.

FCC NOTE: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment. FCC ID: OKLM5MAX

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

ESCORT

GPS Powered for Speed and Location Intelligence





Open 🔿

SSPORT MAX

High Definition Radar Performance™



RADAR·LASER·SAFETY CAMERA·DETECTOR

Pre-loaded DEFENDER Database


Quick Reference

Congratulations



You've just purchased the first and only radar/ laser detector to offer High-Definition[™] (HD) performance and accuracy-the all new PASSPORT Max.

Go to EscortInc.com for full featured Owner's Manual.



PASSPORT Max Features

- PASSPORT Max's HD Performance feature accurately identifies real threats sooner than any other detector, providing more advanced warning when you need it.
- PASSPORT Max's GPS location-based intelligence automatically locks out false alerts and allows you to mark locations for future reference.
- DEFENDER PASSPORT Max gives you access to ESCORT's **DEFENDER** Database.

which warns you of verified speed traps, speed cameras, and red light cameras.

• Plus, it's compatible with ESCORT Live, our exclusive real-time ticket-protection network, which warns you of upcoming alerts received and reported by other users in the area, and gives you access to local speed limit data for over-speed alerts.*



HIGH DEFINITION RADAR PERFORMANCE"





*Requires Optional SmartCord Live and app subscription.

ESCORT ((Live!))

Installation

Mounting Tips:

- Center of windshield between driver and passenger
- Ensure clear view of road ahead and sky above.
- Avoid windshield wipers and heavily tinted areas.


To mount PASSPORT Max in your vehicle:

- **1** Remove backing from StickyCup mount.
- **2** Firmly press StickyCup onto windshield and flip locking clamp to secure.
- **3** Slide PASSPORT Max mounting slot onto mounting bracket and push back gently to lock into place.
- **4** To adjust view, loosen thumb wheel and adjust angle of mounting bracket. Tighten thumb wheel to secure.

- **5** To remove detector, press mount release button on PASSPORT Max and slide device off mount.
- **6** To remove mount from windshield, release locking clamp and pull tab on top of StickyCup.

StickyCup Care Instructions:

To clean your StickyCup, simply rinse under warm water, gently wipe off any debris and allow to air dry.

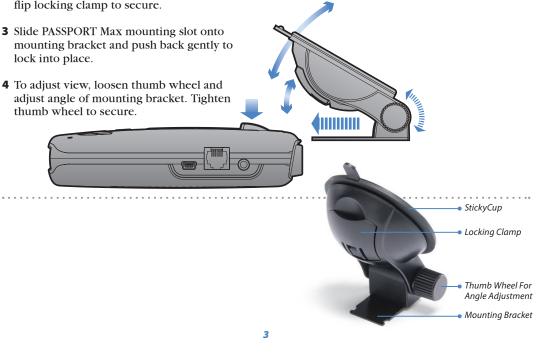

Controls & Features

Using PASSPORT Max

- **1** Plug small end of SmartCord into modular jack on PASSPORT Max and large end of SmartCord into your car's lighter/accessory socket.
- **2** PASSPORT Max should power on automatically. If not, press the device's power button. (
- **3** Upon initial power-up, PASSPORT Max will ask you to confirm some basic Settings and Preferences. Press MRK button to scroll through and OK these Settings (or press VOLUME + and - to edit).

NOTE: You can easily access and customize all of your Settings and Preferences by pressing and holding the MRK and SEN buttons. See Settings & Preferences for details.



Using SmartCord™

- Mute Button: Press to mute an alert; press three times to lock out a false alert; press twice while receiving a locked-out alert to unlock.
- Alert Light: Blinks orange when receiving an alert.
- Power Light: Lights blue when receiving power



Modular Connector Plugs into detector jack

Lighter Adapter Connects to lighter/accessory socket

Earphone Jack


Connects to optional 3.5 mm stereo earphone.

Modular Jack


Connects to SmartCord for powering your device

Mini USB Jack

Connects to your computer via USB A/mini B cable for downloading software updates



To mark a location for future alerts, press MRK twice, then VOL + or to select the type of marker, then MRK again to confirm. Press twice while receiving marker alert to unmark



Mount Release

70 **49** Highway

Display Showing current speed

Display

OverSpeed alert setting that can be adjusted in Preferences. Speed limit data will show here when connected to ESCORT Live

Mute

Press to mute an alert: press three times to lock out a false alert: press twice while receiving a locked-out alert to unlock

RRT

Press to adjust display brightness (Min, Med, Max, Auto, Dark)

SEN

Press to adjust detector sensitivity (Highway, Auto, Auto NoX)

Volume

Press and hold + or to adjust volume

Continued ->